FANBACK SERIES

ASSEMBLY INSTRUCTIONS

#368 Folding Chair



Tools Required

- Hammer
- #2 Square Head Bit
- Power Drill
- 7/16” Socket or 7/16" Wrench

Included Hardware

A		2	¼” x 2½” Carriage Bolt
B		2	¼” x 3” Carriage Bolt
C		2	¼” x 3½” Lag Bolt
D		12	¼” Washers
E		4	¼” Nut

Instructions:

1. Unpack items from box(es). Be sure to match any numbers & letters that you may find on the pieces. Set the seat on a flat surface or table.

2. To begin, set the back on the seat. Fasten the 1" strip from the back to the seat using 1 (A) ¼” x 2½” Carriage Bolt, 2 (D) ¼” Washers and 1 (E) ¼” Nut. Place one washer between the 1" strip and seat and the other between the seat & nut. Repeat on the other side. (Illustration 2)

3. Pull out the legs and set upright. To fasten the arms, first insert 1 (B) ¼” x 3” Carriage Bolt in to the pre-drilled hole starting on the inside of the leg. Place a washer on the carriage bolt on the outside of the leg. (Illustration 3) Insert the arm and fasten using a 1 (D) ¼” Washers and (E) ¼” Nut. (Illustration 4). Repeat on the other side.

4. Fasten the arm to the back of the chair using 1 (C) ¼” x 3½” Lag Bolt and 2 (D) ¼” Washers. Place a washer between the lag bolt and arm and the other one between the arm and the back. Tighten. Repeat on the other side. (Illustration 5)





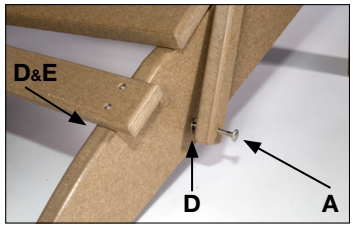


Illustration 2

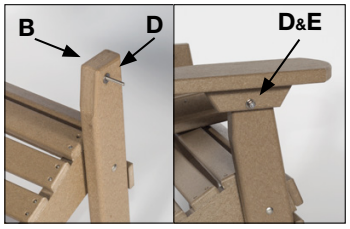


Illustration 3

Illustration 4

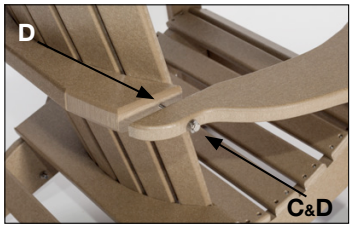


Illustration 5